


SPECIFICATION

		MODEL		XZU600J	XZU600K	XZU640K
ITEM	MODEL CODE			XZU600R - HKMLJ3	XZU600R - HKMLK3	XZU640R - HKMLK3
ENGINE	MODEL			N04C-UY	N04C-VA	
	TYPE			Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct Injection		
	DISPLACEMENT cc			4,009		
	MAX OUTPUT (JIS GROSS) kW(PS)/rpm			84.6 (115) / 2,800	104 (142) / 2,500	
	MAX. TORQUE (JIS GROSS) Nm(kgfm)/rpm			324 (33) / 1,600	402 (41) / 1,600	
	BORE & STROKE mm			104 x 118		
	FUEL INJECTION SYSTEM			Electronic control Commonrail type		
	AIR INTAKE SYSTEM			Turbo-intercooled, stack type		
MAX.ENGINE SPEED rpm			3,000			
CLUTCH	TYPE			Dry single plate, diaphragm type with damper spring		
	DIAMETER mm			300		
TRANSMISSION	MODEL/NO. OF SPEED			M550 / 5-Speed / Manual		
	TYPE			Five (5) forward and one (1) reversed, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>		
	RATIO (1st - TOP)			4.981 / 0.738		
AXLE	FRONT	TYPE		Reversed Elliot, "I" section beam		
		CAPACITY kg	2,600			
	REAR	TYPE		Full floating, single reduction, single speed by hypoid gearing		
		CAPACITY kg	4,400			
BRAKE	SERVICE BRAKE TYPE			Hydraulic system with ventilated disc for front wheels and drum brakes for rear wheels with auto brake shoe adjuster		
	SERVICE BRAKE CONTROL			Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist		
	PARKING BRAKE TYPE			Mechanical, internal expanding, acting on transmission output shaft		
	EXHAUST BRAKE TYPE			Electric-vacuum actuator with valve in exhaust pipe		
SUSPENSION	FRONT	TYPE		Semi elliptic leaf spring with dual acting shock absorber and stabilizer		
	REAR	TYPE		Semi elliptic main and auxiliary leaf spring with dual acting shock absorber		
FRAME	FRAME WIDTH mm			700		
	HEIGHT x WIDTH x THICKNESS mm			192 x 65 x 6.0		
CABIN	TILTING			Mechanical Type		
	STEERING			Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type		
	HINO ARMTECH			Equipped		
	POWER WINDOW			Equipped		
	CENTRAL LOCKING			Equipped		
	SEAT BELT			Equipped		
WHEELS & TIRES	WHEEL TYPE			5 studs		
	RIM SIZE			16 x 5.50F – 115		
	TIRE SIZE			205/85R16		
ELECTRICAL	TYPE			24V, Negative Earth		
	BATTERIES			12V x 2 , Series connection		
	ALTERNATOR CAPACITY			24V - 60 Amps		
FUEL TANK CAPACITY L			80		100	
PERFORMANCE						
G.V.W Rating kg			4,800			
PERFORMANCE	MAX SPEED km/h			100 (*with Speed Limiter)		
	GRADEABILITY (tan Ø) %			40.3	53.2	
TRANSMISSION RATIO	MODEL			M550		
	1st			4.981		
	2nd			2.911		
	3rd			1.556		
	4th			1.000		
	5th			0.738		
	REVERSE			4.625		
REAR AXLE	MODEL			BD26A		
	RATIO			4.625		
DIMENSION & MASS						
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE kg			1,365		1,405
	REAR AXLE kg			650		675
	TOTAL kg			2,015		2,080
DIMENSION	WHEELBASE	WB	mm	2,525		3,075
	OVERALL LENGTH	OL	mm	4,680		5,465
	OVERALL WIDTH	OW	mm	1,695		
	OVERALL HEIGHT	OH	mm	2,135		2,130
	CAB TO AXLE CENTER	CA	mm	1,945		2,495
	FRONT OVERHANG	FOH	mm	985		
	REAR OVERHANG	ROH	mm	1,135		1,370
	FRONT TREAD	FT	mm	1,440		
	REAR TREAD	RT	mm	1,390		
	TURNING RADIUS (ON TIRE)		mm	5,500		6,100
SEATING CAPACITY			3			
HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.						

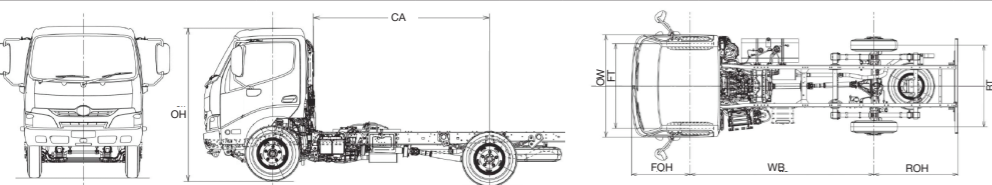

HINO Authorized Dealer:

Ver. 05/04.2018



HINO 300 SERIES



- XZU600J 115ps
- XZU600K 142ps
- XZU640K 142ps

Designed GVW 4,800 kg  
(4 Wheeler)

WARRANTY\*  
36 MONTHS  
or 100,000KM

FREE\*  
SERVICE PROGRAM  
3 TIMES  
(1<sup>st</sup>-3<sup>rd</sup> Service)

FREE\*  
PARTS PROGRAM  
7 TIMES  
(4<sup>th</sup>-10<sup>th</sup> Service)

PROTECTED BY  
HINO  
ArmTech

BREAKDOWN  
24 HOURS SERVICE  
Toll Free: 1800-88-3666

Terms and Conditions apply\*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

PERFORMANCE



ENGINE



**N04C-UY**  
Engine:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
84.6 (115PS)/2,800rpm



Torque (Nm/rpm):  
324Nm (33kgfm)/1,600rpm



**N04C-VA**  
Engine:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
104 (142PS)/2,500rpm

Torque (Nm/rpm):  
402Nm (41kgfm)/1,600rpm

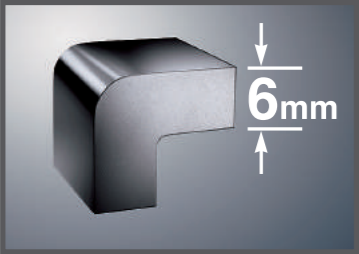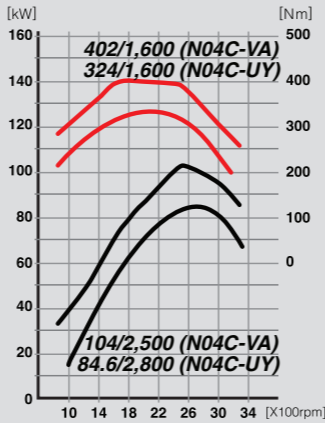

Frame

The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY



Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console

Greater convenience for documents storage with open section which allows easy access.



Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



Work space

Intuitively designed, roomy and comfortable, the cab space allows drivers to perform at their best.

SAFETY

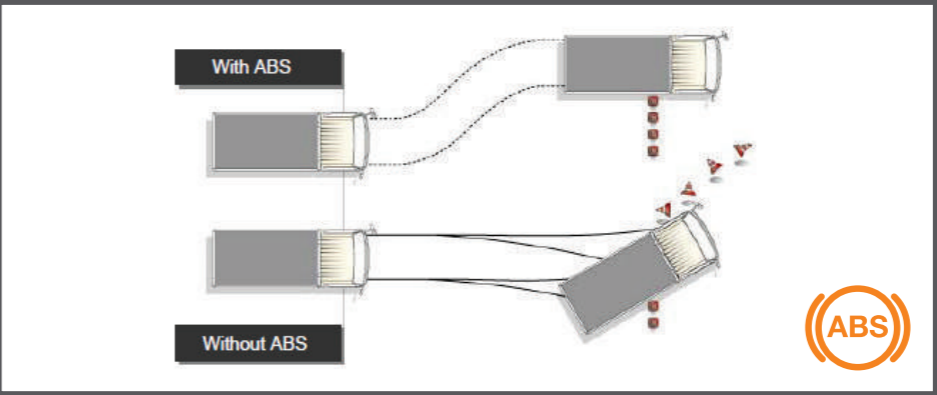


Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.

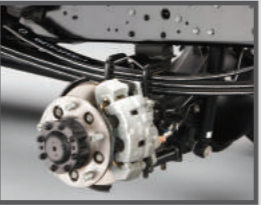


Disc Brake (Front)

Ventilated disc brake is used for maximum heat dissipation to ensure safe and effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.

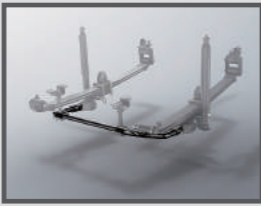

Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.

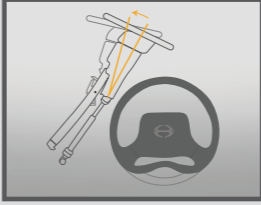

Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION

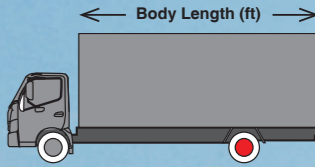


Model	XZU600	XZU640
Standard	10'4"	13'0"
Optional	14'2"	15'2"


Drive Axle

Body Type


A truck for every application of bodies suit your type of business.




General Cargo




Box




Curtain Sider



Refrigerated



Tipper



Crane Cargo



Roll On Roll off



Tanker

Note : Some images may be used for illustration purposes only.