


# SPECIFICATION

		NICKNAME	<b>XZU710K</b>	<b>XZU720K</b>	
ITEM	MODEL CODE		XZU710R-HKMQK3	XZU720R-HKMQK3	
ENGINE	MODEL		N04C-VA		
	TYPE		Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection		
	DISPLACEMENT	cc	4,009		
	MAX OUTPUT (JIS GROSS)	kW(PS)/rpm	104 (142) / 2,500		
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm	402 (41) / 1,600		
	BORE & STROKE	mm	104 x 118		
	FUEL INJECTION SYSTEM		Electronic control Commonrail type		
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type		
	MAX. ENGINE SPEED	rpm	3,000		
CLUTCH	TYPE		Dry single plate, diaphragm type with damper spring		
	DIAMETER	mm	300		
TRANSMISSION	MODEL/NO. OF SPEED		M550 / Manual 5-Speed		
	TYPE		Five (5) forward and one (1) reverse, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>		
	RATIO (1st - Top)		4.981 / 0.738		
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam		
		CAPACITY	3,100		
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing		
		CAPACITY	5,100		
BRAKE	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster		
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist		
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft		
	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe		
SUSPENSION	FRONT	TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer		
	REAR	TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber		
FRAME	FRAME WIDTH	mm	750		
	HEIGHT x WIDTH x THICKNESS	mm	192.8 x 65 x 5.9		
CABIN	TILTING		Mechanical Type		
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type		
	HINO ARMTECH		Equipped		
	POWER WINDOW		Equipped		
	CENTRAL LOCKING		Equipped		
	SEAT BELT		Equipped		
WHEELS & TIRES	WHEEL TYPE		6 Stud		
	WHEEL SIZE		17.5 x 6.00GS - 127		
	TIRE SIZE		215/75 R 17.5 - 12PR		
ELECTRICAL	TYPE		24V, Negative Earth		
	BATTERIES		12V x 2, Series connection		
	ALTERNATOR CAPACITY		24V - 60 Amps		
FUEL TANK CAPACITY	L		100		
<b>PERFORMANCE</b>					
G.V.W Rating	kg		7,500		
PERFORMANCE	MAX SPEED	km/h	100 (* With Speed Limiter)		
	GRADEABILITY	(tan Ø) %	43.8		
TRANSMISSION RATIO	MODEL		M550		
	1st		4.981		
	2nd		2.911		
	3rd		1.556		
	4th		1.000		
	5th		0.738		
	REVERSE		4.625		
REAR AXLE	MODEL		SH12		
	RATIO		5.375		
<b>DIMENSION &amp; MASS</b>					
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,580	1,595	
	REAR AXLE	kg	910		
	TOTAL	kg	2,490	2,505	
DIMENSION	WHEELBASE	WB	mm	3,430	3,870
	OVERALL LENGTH	OL	mm	6,120	6,740
	OVERALL WIDTH	OW	mm		1,995
	OVERALL HEIGHT	OH	mm		2,230
	CAB TO AXLE CENTER	CA	mm	2,870	3,310
	FRONT OVERHANG	FOH	mm		1,115
	REAR OVERHANG	ROH	mm	1,575	1,755
	FRONT TREAD	FT	mm		1,655
	REAR TREAD	RT	mm		1,520
	TURNING RADIUS (on tire)		mm	5,700	6,400
SEATING CAPACITY			3		

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

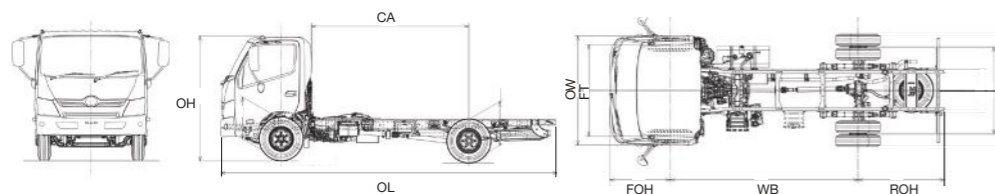

HINO Authorized Dealer:

Ver. 03/8.2017



# HINO 300 SERIES



Compliance with United Nations Regulation (UNR) by JPJ



**XZU710K** 142ps

**XZU720K** 142ps

Designed GVW 7,500 kg  
(6 Wheeler)

WARRANTY\*  
**36 MONTHS**  
or 100,000KM

FREE\*  
SERVICE PROGRAM  
**3 TIMES**  
(1<sup>st</sup>-3<sup>rd</sup> Service)

FREE\*  
PARTS PROGRAM  
**7 TIMES**  
(4<sup>th</sup>-10<sup>th</sup> Service)

PROTECTED BY  
**HINO**  
ArmTech

BREAKDOWN  
**24 HOURS**  
SERVICE  
Toll Free: 1800-88-3666

Terms and Conditions apply\*


HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my



## PERFORMANCE


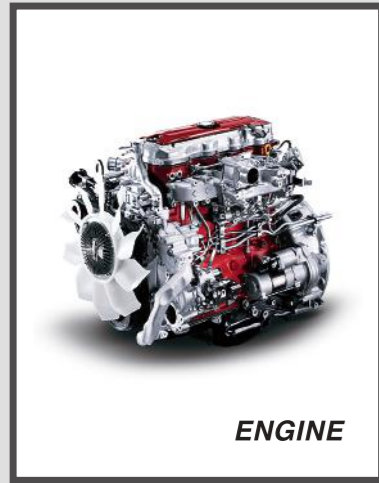


**EURO 3**  
**XZU710K**  
**XZU720K**

Model:  
**N04C-VA**  
Type:  
**4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail**

Output (kW/rpm):  
**104 (142PS)/2,500rpm**

Torque (Nm/rpm):  
**402Nm (41kgfm)/1,600rpm**

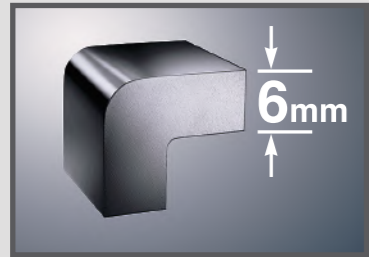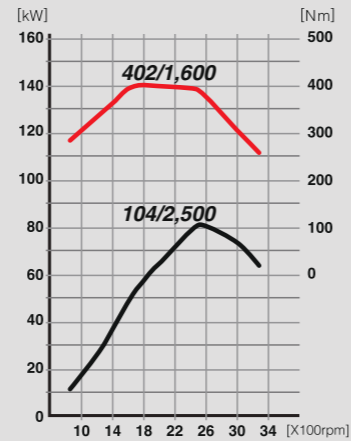

### Frame


The frame is both very strong and lightweight



### Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

## COMFORTABILITY

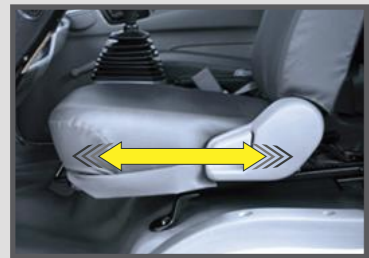

### Seat Slide

The seat rails are set on an incline to accommodate your seating position.



### Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



### LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



### Overhead Console

Greater convenience for documents storage with open section which allows easy access.



### Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



### Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

## SAFETY

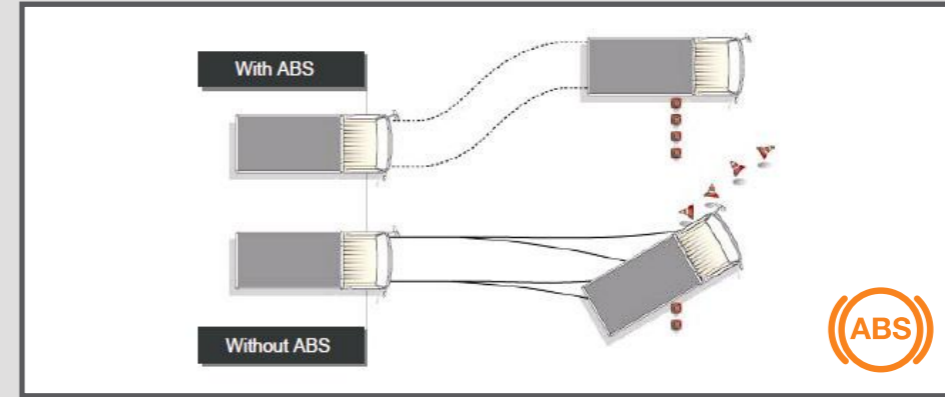

### Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



### EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



### Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



### Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



### Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



### Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




### Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



### Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



### Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



### Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

## APPLICATION

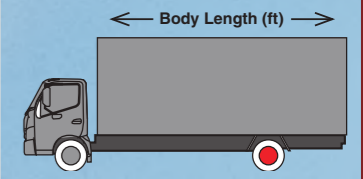






Model	XZU710K ECO	
Standard	14'10"	
Optional	20'4"	21'7"

Model	XZU720K ECO	
Standard	17'	
Optional	20'4"	21'7"

● Drive Axle

### Body Type

A truck for every application of bodies suit your type of business.



Note : Some images may be used for illustration purposes only.