


ISUZU

ELF



SPECIFICATIONS		NLR PRO		NLR 130	
MODEL CODE		NLR77UEE-2E		NLR85UEE-2E	
Drive Train		4 x 2			
ENGINE					
Model		4JH1-TC		4JU1-TC	
Type		4-Cylinder In-line, 4-Cycle, Water-Cooled OHV, Turbo with Intercooler		4-Cylinder In-line, 4-Cycle, Water-Cooled DOHC, Turbo with Intercooler	
Displacement		cc		2,999	
Bore x Stroke		mm		95.4 x 104.9	
Maximum Output (Gross)		kW (PS)@rpm		81 (110)@3,200	
Maximum Torque		Nm (kgm)@rpm		230 (23.5)@1,400-3,200	
Emission Level		Euro 2			
Fuel System		Common Rail Direct Injection			
TRANSMISSION					
Model / No. of Speed		MSB-5S / 5-Speed Manual		MYV-5T / 5-Speed Manual	
Gear Ratio		1st		5.016	
		2nd		2.672	
		3rd		1.585	
		4th		1.000	
		5th		0.770	
		Reverse		4.783	
		Final		5.857	
WEIGHT & CAPACITIES					
Gross Vehicle Weight		kg		4,800	
Curb Weight		kg		1,865	
Front		kg		1,345	
Rear		kg		520	
Fuel Tank Capacity		l		75	
AXLE					
Front		Type		Reverse Elliot, I-Beam	
Front Axle Capacity (Design)		kg		2,900	
Rear		Type		Banjo, Full Floating	
Rear Axle Capacity (Design)		kg		3,600	
SUSPENSION SYSTEM					
Suspension		Front		Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber, Stabiliser Bar	
		Rear		Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber	
TYRES & WHEELS					
Tyres				205 / 85R16	
Wheels				16 x 5.5J-85	
BRAKES					
Service				Drum Brakes with Dual Circuit Hydraulic Control, Vacuum Assistance and Load Sensing Proportioning Valve (LSPV)	
Parking Brake Type				Transmission Mounted, Mechanical Operated Internal Expanding	
Auxiliary				Exhaust Brake	
STEERING					
Steering System				Power Assist, Recirculating Ball Type	
Min. Turning Radius		m		5.1	
ELECTRICAL					
Battery				12V x 2	
Alternator		12V-60A		24V-90A	
DIMENSION					
Overall Length		OAL mm		4,730	
Overall Width		OAW mm		1,815	
Overall Height		OAH mm		2,172	
Wheelbase		WB mm		2,475	
Front Overhang		FOH mm		1,110	
Rear Overhang		ROH mm		1,145	
Front Tread		AW mm		1,475	
Rear Tread		CW mm		1,395	
Cab to Axle Center		CA mm		2,028	
WHEELBASE MODIFICATIONS					
Option		mm		3,100	

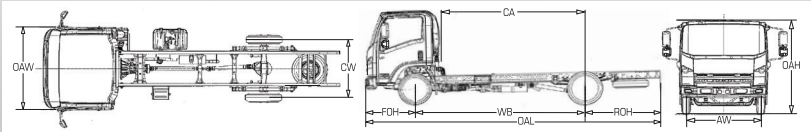

Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.



ISUZU MALAYSIA SDN BHD (664946-H)  
501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,  
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.  
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779  
HOTLINE: 1-300-88-1133 www.isuzu.net.my

Dealer's information

Ver.01/Oct2018/BPDCVD.JL

**FREE**  
SERVICE CAMPAIGN

 **UP TO 100,000km\***  
\*Terms and Conditions apply.

**ISUZU**

WARRANTY

**5**  
YEARS OR  
150,000KM  
whichever comes first

**ISUZU**  
**DOCTOR**  
**MOBILE**

**24**  
HOURS SERVICE

 **1-800-88-8000**

Reliable support with  
round-the-clock  
business operation.

4 WHEELER

NLR  
PRO  
GVW 4,800kg

NLR  
130  
GVW 4,800kg




PERFORMANCE



NLR PRO

4JH1-TC  
HEAVY DUTY COMMONRAIL  
Displacement: 2,999cc  
Max. Output (Gross): 110ps (81kW) @3,200rpm  
Max. Torque: 230Nm @1,400 - 3,200rpm

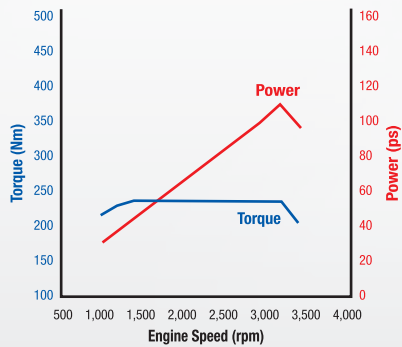

NLR 130


4JJ1-TC  
HEAVY DUTY COMMONRAIL  
Displacement: 2,999cc  
Max. Output (Gross): 130ps (96kW) @2,800rpm  
Max. Torque: 330Nm @1,600 - 2,600rpm



90  
Amperes



Higher alternator capacity  
(Applicable to NLR130).

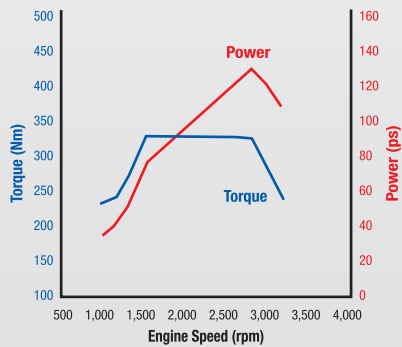

EXTERIOR



New chrome fang grille.

90 Degrees door opening.



Door visor.

INTERIOR



Narrow cabin makes driving manoeuvrability in tight places easier.


Audio and Air-cond units.



Driver side storage.

SAFETY


Energy absorbing steering wheel and column.




Door impact beam with high tensile strength reinforcement frame.



Rear fog lamp and reverse sensor.

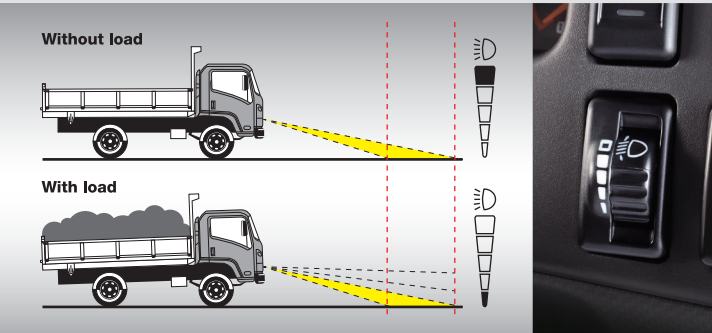

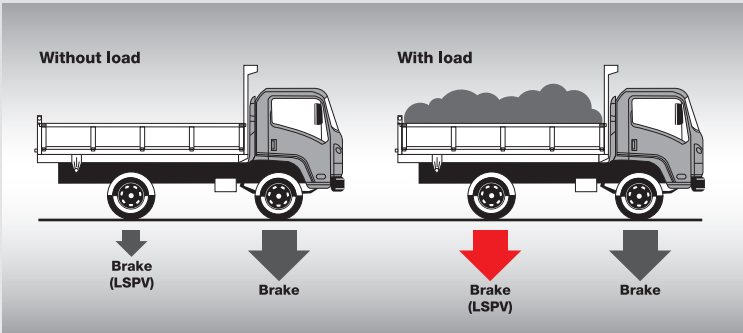

Headlight leveling. Preferred headlight beam position can be maintained when truck is loaded and when it has no load.




Load sensing proportioning valve (LSPV).

BODY APPLICATION


BODY APPLICATION	<div><div>←Body Length (ft)→</div></div>	MODEL		NLR PRO	NLR 130
				NLR77UEE-2E	NLR85UEE-2E
		Standard	ft	10*	10*
		Options (UBS)	ft	13*	13*




Wooden Cargo




Wooden Cargo w/ Canvas



Steel Cargo w/ Canvas



Corrugated Box



Box (Food Truck)

\*Body length may vary according to rear body type application. Refer to ISUZU authorised drawing plan for actual body length at ISUZU dealers. Pictures shown are for illustration purposes only.