


SPECIFICATION

ITEM	MODEL		XZU720_{L8}	XZU730_{L8}
	MODEL CODE		XZU720R - HKFTL3	XZU730R - HKFTL3
ENGINE	MODEL		N04C-VB	
	TYPE		Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection	
	DISPLACEMENT		cc	
	MAX OUTPUT (JIS GROSS)		kW(PS)/rpm	
	MAX. TORQUE (JIS GROSS)		Nm(kgfm)/rpm	
	BORE & STROKE		mm	
	FUEL INJECTION SYSTEM		Electronic control commonrail type	
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type	
	MAX. ENGINE SPEED		rpm	
	CLUTCH		TYPE	
DIAMETER		mm		
TRANSMISSION	MODEL/NO. OF SPEED		MYY6S / Manual 6-Speed	
	TYPE		Six (6) forward and one (1) reverse, overdrive, synchromesh 1 st - 6 th	
	RATIO (1st - Top)		5.979 / 0.759	
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam	
		CAPACITY	kg	
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing	
		CAPACITY	kg	
BRAKE	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster	
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist	
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft	
	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe	
SUSPENSION	FRONT	TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer	
	REAR	TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber	
FRAME	FRAME WIDTH		mm	
	HEIGHT x WIDTH x THICKNESS		mm	
CABIN	TILTING		Mechanical Type	
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type	
	HINO ARMTECH		Equipped	
	POWER WINDOW		Equipped	
	CENTRAL LOCKING		Equipped	
	SEAT BELT		Equipped	
WHEELS & TIRES	WHEEL TYPE		6 Studs	
	WHEEL SIZE		17.5 x 6.00GS - 127	
	TIRE SIZE		215/75 R 17.5 - 12PR	
ELECTRICAL	TYPE		24V, Negative Earth	
	BATTERIES		12V x 2 , Series connection	
	ALTERNATOR CAPACITY		24V - 60 Amps	
FUEL TANK CAPACITY		L		
PERFORMANCE				
G.V.W Rating		kg		
PERFORMANCE	MAX SPEED		km/h	
	GRADEABILITY		(tan Ø) %	
TRANSMISSION RATIO	MODEL		MYY6S	
	1st		5.979	
	2nd		3.434	
	3rd		1.862	
	4th		1.297	
	5th		1.000	
	6th		0.759	
REAR AXLE	MODEL		SH13	
	RATIO		5.571	
DIMENSION & MASS				
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE		kg	
	REAR AXLE		kg	
	TOTAL		kg	
DIMENSION	WHEELBASE		WB	
	OVERALL LENGTH		OL	
	OVERALL WIDTH		OW	
	OVERALL HEIGHT		OH	
	CAB TO AXLE CENTER		CA	
	FRONT OVERHANG		FOH	
	REAR OVERHANG		ROH	
	FRONT TREAD		FT	
	REAR TREAD		RT	
	TURNING RADIUS (on tire)		mm	
SEATING CAPACITY				

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

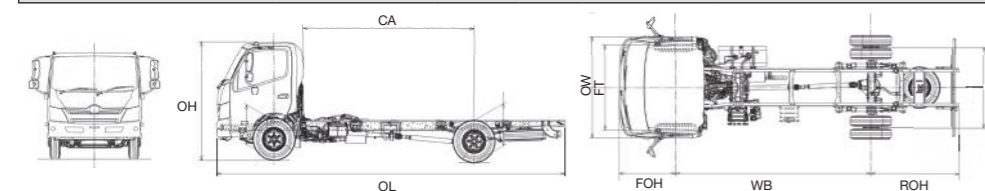

HINO Authorized Dealer:

Ver. 03/8.2017



HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



XZU720_{8.5} 156ps

XZU730_{8.5} 156ps

Designed GVW 8,500 kg (6 Wheeler)

WARRANTY*
36 MONTHS
or 100,000KM

FREE*
SERVICE PROGRAM
3 TIMES
(1st-3rd Service)

FREE*
PARTS PROGRAM
7 TIMES
(4th-10th Service)

PROTECTED BY
HINO
ArmTech

BREAKDOWN
24 HOURS SERVICE
Toll Free: 1800-88-3666


Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276
Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

PERFORMANCE


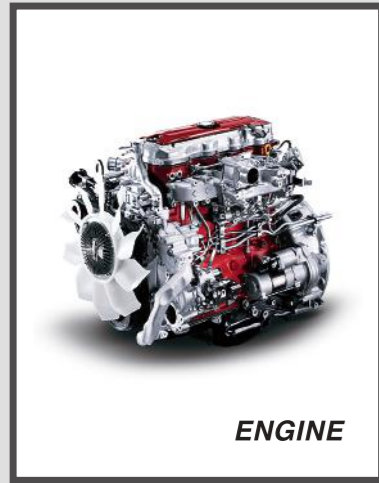


EURO 3
XZU720 8.5
XZU730 8.5

Model:
N04C-VB
Type:
**4,009cc 4-cylinder in-line
Electronic Control
Commonrail**

Output (kW/rpm):
114 (156PS)/2,800rpm

Torque (Nm/rpm):
429Nm (43.8kgfm)/1,400rpm

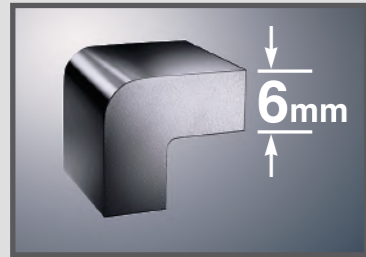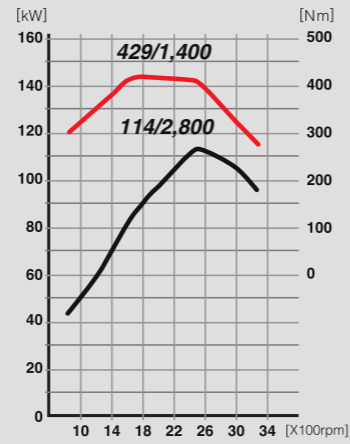

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

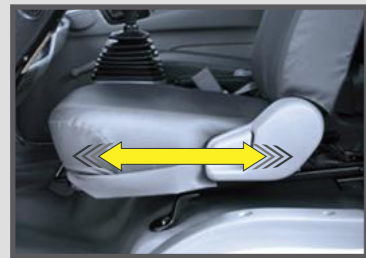

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console

Greater convenience for documents storage with open section which allows easy access.



Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

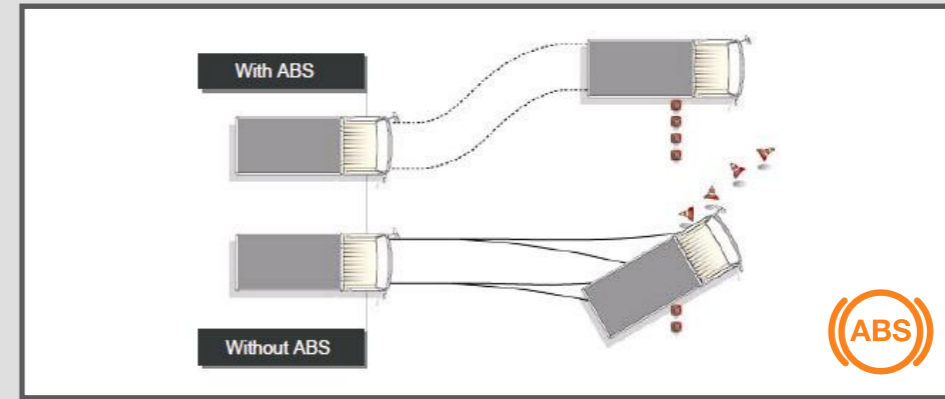

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.




Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION

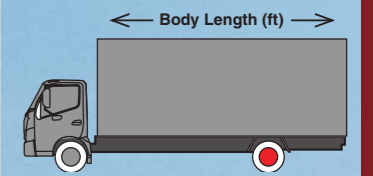

Model	XZU720 8.5	XZU730 8.5
Standard	16'10"	18'6"
Optional	20'2" 21'5"	20'2" 21'5"


● Drive Axle

Body Type


A truck for every application of bodies suit your type of business.




General Cargo



Box




Curtain Sider



Refrigerated




Tipper



Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.