


SPECIFICATION

		MODEL		XZU720R - HKFTL3	XZU730R - HKFTL3
ITEM	MODEL CODE			XZU720R - HKFTL3	XZU730R - HKFTL3
ENGINE	MODEL			N04C-VB	
	TYPE			Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection	
	DISPLACEMENT			cc	
	MAX OUTPUT (JIS GROSS)			kW(PS)/rpm	
	MAX. TORQUE (JIS GROSS)			Nm(kgfm)/rpm	
	BORE & STROKE			mm	
	FUEL INJECTION SYSTEM			Electronic control commonrail type	
	AIR INTAKE SYSTEM			Turbo-intercooled, stack type	
MAX.ENGINE SPEED			rpm		
CLUTCH	TYPE			Dry single plate, diaphragm type with damper spring	
	DIAMETER			mm	
TRANSMISSION	MODEL/NO. OF SPEED			MYY6S / Manual 6-Speed	
	TYPE			Six (6) forward and one (1) reverse, overdrive, synchromesh 1 st - 6 ^h	
	RATIO (1st - Top)			5.979 / 0.759	
AXLE	FRONT	TYPE	kg	Reversed Elliot, "I" section beam	
		CAPACITY		3,100	
	REAR	TYPE	kg	Full floating, single reduction, single speed by hypoid gearing	
CAPACITY	6,200				
BRAKE	SERVICE BRAKE TYPE			Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster	
	SERVICE BRAKE CONTROL			Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist	
	PARKING BRAKE TYPE			Mechanical, internal expanding, acting on transmission output shaft	
	EXHAUST BRAKE TYPE			Electric-vacuum actuator with valve in exhaust pipe	
SUSPENSION	FRONT	TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer		
	REAR	TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber		
FRAME	FRAME WIDTH			mm	
	HEIGHT x WIDTH x THICKNESS			mm	
CABIN	TILTING			750	
	STEERING			Mechanical Type	
	HINO ARMTECH			Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type	
	POWER WINDOW			Equipped	
	CENTRAL LOCKING			Equipped	
	SEAT BELT			Equipped	
WHEELS & TIRES	WHEEL TYPE			6 Studs	
	WHEEL SIZE			17.5 x 6.00GS - 127	
	TIRE SIZE			215/75 R 17.5 - 12PR	
ELECTRICAL	TYPE			24V, Negative Earth	
	BATTERIES			12V x 2 , Series connection	
	ALTERNATOR CAPACITY			24V - 60 Amps	
FUEL TANK CAPACITY				L	100
PERFORMANCE					
G.V.W Rating				kg	8,500
PERFORMANCE	MAX SPEED			km/h	
	GRADEABILITY			(tan Ø) %	
TRANSMISSION RATIO	MODEL			MYY6S	
	1st			5.979	
	2nd			3.434	
	3rd			1.862	
	4th			1.297	
	5th			1.000	
	6th			0.759	
	REVERSE			5.701	
REAR AXLE	MODEL			SH13	
	RATIO			5.571	
DIMENSION & MASS					
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE			kg	1,655
	REAR AXLE			kg	960
	TOTAL			kg	2,615
DIMENSION	WHEELBASE			WB	mm
	OVERALL LENGTH			OL	mm
	OVERALL WIDTH			OW	mm
	OVERALL HEIGHT			OH	mm
	CAB TO AXLE CENTER			CA	mm
	FRONT OVERHANG			FOH	mm
	REAR OVERHANG			ROH	mm
	FRONT TREAD			FT	mm
	REAR TREAD			RT	mm
	TURNING RADIUS (on tire)			mm	
	SEATING CAPACITY				
HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.					

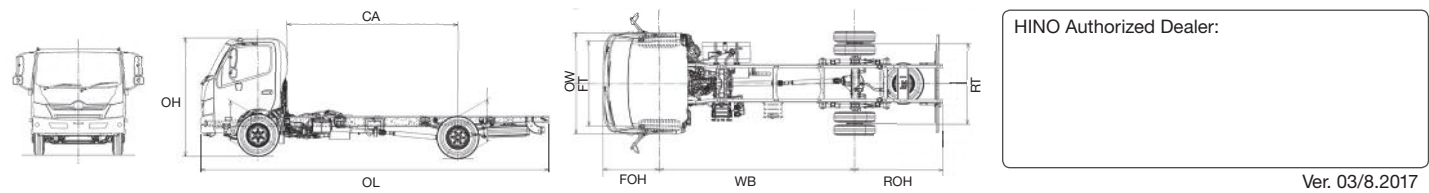

HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



XZU720 8.5 156ps

XZU730 8.5 156ps

Designed GVW 8,500 kg (6 Wheeler)

WARRANTY*
36 MONTHS
or 100,000KM

FREE*
SERVICE PROGRAM
3 TIMES
(1st-3rd Service)

FREE*
PARTS PROGRAM
7 TIMES
(4th-10th Service)

PROTECTED BY
HINO
ArmTech

BREAKDOWN
24 HOURS SERVICE
Toll Free: 1800-88-3666

Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)


Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276

Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993

Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my



PERFORMANCE

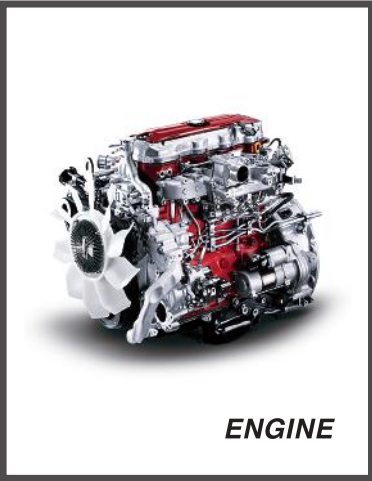

ENGINE

EURO3
XZU720 8.5
XZU730 8.5

Model:
N04C-VB
Type:
4,009cc 4-cylinder in-line
Electronic Control
Commonrail
Output (kW/rpm):
114 (156PS)/2,800rpm
Torque (Nm/rpm):
429Nm (43.8kgfm)/1,400rpm

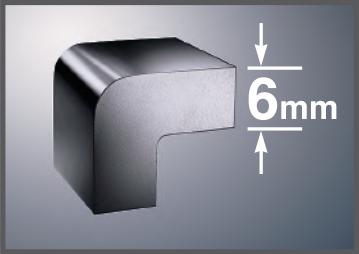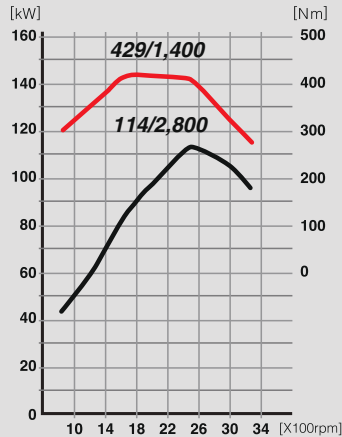


Frame
The frame is both very strong and lightweight



Suspension
The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

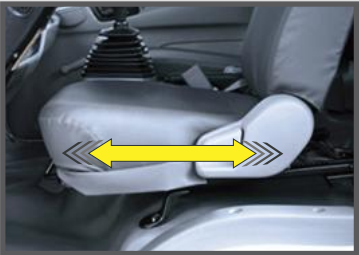

Seat Slide
The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever
The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel
The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console
Greater convenience for documents storage with open section which allows easy access.




Wide Free Rack
Ergonomically designed open storage space and within driver's reach for greater convenience.



Work Space
Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

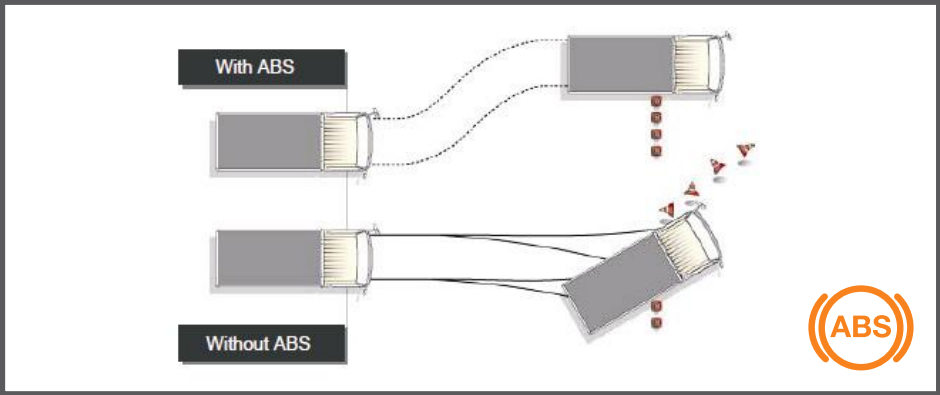

Antilock Braking System (ABS)
ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)
The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake
Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres
Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer
The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.




Door Impact Beams
The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.



Side Mirror
The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars
The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.




Energy-Absorbing Steering Wheel and Column
The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch
The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION




Model	XZU720 8.5	XZU730 8.5
Standard	16'10"	18'6"
Optional	20'2" 21'5"	20'2" 21'5"

● Drive Axle


Body Type
A truck for every application of bodies suit your type of business.




General Cargo




Box




Curtain Sider



Refrigerated




Tipper



Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.