


SPECIFICATION

		MODEL	XZU710L	XZU720L	XZU730L
ITEM	MODEL CODE		XZU710R - HKMQL3	XZU720R - HKMQL3	XZU730R - HKMQL3
ENGINE	MODEL		N04C-VB		
	TYPE		Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection		
	DISPLACEMENT		4,009		
	MAX OUTPUT (JIS GROSS)		114 (156) / 2,800		
	MAX. TORQUE (JIS GROSS)		429 (43.8) / 1,400		
	BORE & STROKE		104 x 118		
	FUEL INJECTION SYSTEM		Electronic control commonrail type		
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type		
CLUTCH	MAX.ENGINE SPEED		3,100		
	TYPE		Dry single plate, diaphragm type with damper spring		
TRANSMISSION	DIAMETER		325		
	MODEL/NO. OF SPEED		M550 / Manual 5-Speed		
	TYPE		Five (5) forward and one (1) reverse, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>		
AXLE	RATIO (1st - Top)		4.981 / 0.738		
	FRONT	TYPE	Reversed Elliot, "I" section beam		
		CAPACITY	3,100		
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing		
	CAPACITY	5,100			
BRAKE	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster		
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist		
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft		
	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe		
SUSPENSION	FRONT TYPE		Semi elliptic leaf spring with dual acting shock absorber and stabilizer		
	REAR TYPE		Semi elliptic main and auxiliary leaf spring with dual acting shock absorber		
FRAME	FRAME WIDTH		750		
	HEIGHT x WIDTH x THICKNESS		192.8 x 65 x 5.9		
CABIN	TILTING		Mechanical Type		
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type		
	HINO ARMTECH		Equipped		
	POWER WINDOW		Equipped		
	CENTRAL LOCKING		Equipped		
	SEAT BELT		Equipped		
WHEELS & TIRES	WHEEL TYPE		6 studs		
	RIM SIZE		17.5 x 6.00GS - 127		
	TIRE SIZE		215/75 R 17.5 - 12PR		
ELECTRICAL	TYPE		24V, Negative Earth		
	BATTERIES		12V x 2 , Series connection		
	ALTERNATOR CAPACITY		24V - 60 Amps		
FUEL TANK CAPACITY		L	100		
PERFORMANCE					
G.V.W Rating		kg	7,500		
PERFORMANCE	MAX SPEED		100 (* With Speed Limiter)		
	GRADEABILITY		44.9		
TRANSMISSION RATIO	MODEL		M550		
	1st		4.981		
	2nd		2.911		
	3rd		1.556		
	4th		1.000		
	5th		0.738		
REAR AXLE	REVERSE		4.625		
	MODEL		SH12		
	RATIO		5.125		
DIMENSION & MASS					
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE		kg	1,580	1,595
	REAR AXLE		kg	910	910
	TOTAL		kg	2,490	2,505
DIMENSION	WHEELBASE		WB	mm	3,430
	OVERALL LENGTH		OL	mm	6,120
	OVERALL WIDTH		OW	mm	1,995
	OVERALL HEIGHT		OH	mm	2,230
	CAB TO AXLE CENTER		CA	mm	2,870
	FRONT OVERHANG		FOH	mm	1,115
	REAR OVERHANG		ROH	mm	1,575
	FRONT TREAD		FT	mm	1,655
	REAR TREAD		RT	mm	1,520
	TURNING RADIUS (on tire)		mm	5,700	6,400
	SEATING CAPACITY				3
HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.					



HINO Authorized Dealer:

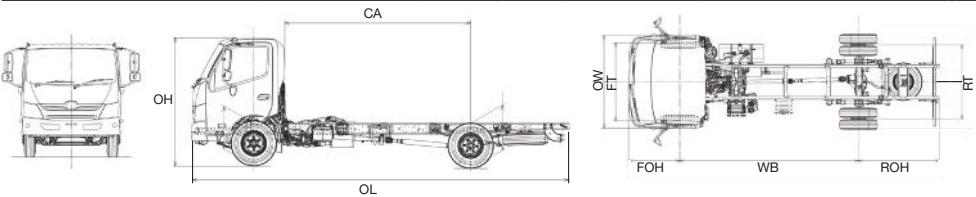

HINO 300 SERIES

POWER

Compliance with United Nations Regulation (UNR) by JPJ



*XZU710L* 156ps  
*XZU720L* 156ps  
*XZU730L* 156ps

Designed GVW 7,500 kg (6 Wheeler)

WARRANTY\*  
36 MONTHS  
or 100,000KM

FREE\*  
SERVICE PROGRAM  
3 TIMES  
(1<sup>st</sup>-3<sup>rd</sup> Service)

FREE\*  
PARTS PROGRAM  
7 TIMES  
(4<sup>th</sup>-10<sup>th</sup> Service)

PROTECTED BY  
HINO  
ArmTech

BREAKDOWN  
24 HOURS SERVICE  
Toll Free: 1800-88-3666

Terms and Conditions apply\*


HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my



PERFORMANCE


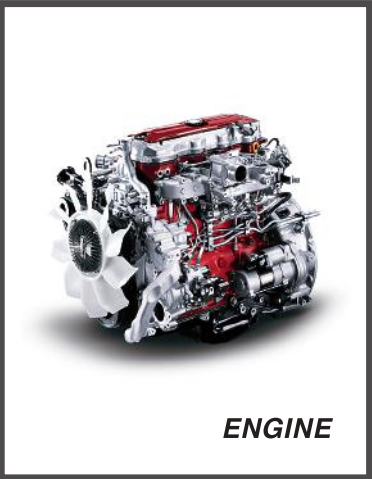


ENGINE

**EURO3**  
**XZU710L**  
**XZU720L**  
**XZU730L**

Model:  
**N04C-VB**  
Type:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
**114 (156PS)/2,800rpm**  
Torque (Nm/rpm):  
**429Nm (43.8kgfm)/1,400rpm**

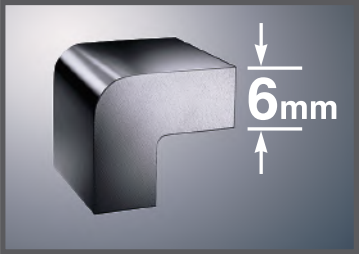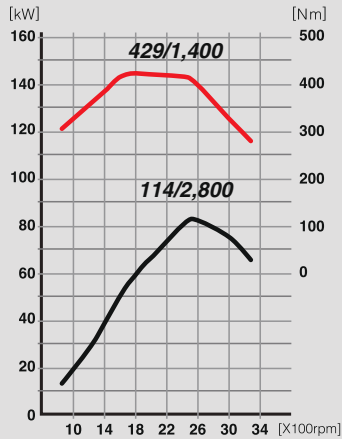


**Frame**  
The frame is both very strong and lightweight



**Suspension**  
The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

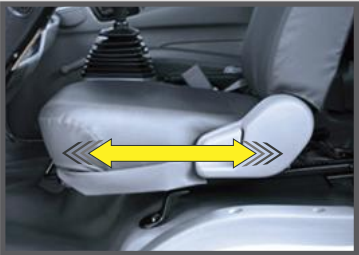

**Seat Slide**  
The seat rails are set on an incline to accommodate your seating position.



**Folding Type Shift Lever**  
The shift lever and side lever fold down, making it easy to move around the driver compartment.



**LED Meter Panel**  
The meter cluster features highly visible readouts of necessary vehicle information.



**Overhead Console**  
Greater convenience for documents storage with open section which allows easy access.




**Wide Free Rack**  
Ergonomically designed open storage space and within driver's reach for greater convenience.



**Work Space**  
Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

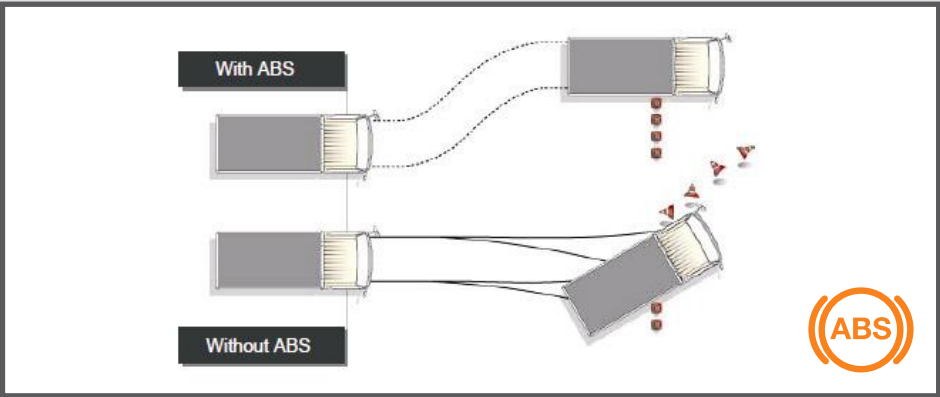

**Antilock Braking System (ABS)**  
ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



**EGIS Cab (Emergency Guard Impact Safety)**  
The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



**Drum Brake**  
Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



**Tubeless Tyres**  
Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



**Stabilizer**  
The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.




**Door Impact Beams**  
The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.



**Side Mirror**  
The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



**Wide View Pillars**  
The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.




**Energy-Absorbing Steering Wheel and Column**  
The energy-absorbing steering wheel and column reduce collision force.



**Headlamp Leveling Switch**  
The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION




Model	XZU710L	XZU720L
Standard	14'10"	17'
Optional	20'4" 21'7"	20'4" 21'7"

Model	XZU730L	Drive Axle
Standard	18'8"	
Optional	20'4" 21'7"	


**Body Type**  
A truck for every application of bodies suit your type of business.




General Cargo



Box




Curtain Sider



Refrigerated



Tipper




Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.